


## Server Case Product 1U

### 1U2Bay Non-hot-swappable Cases

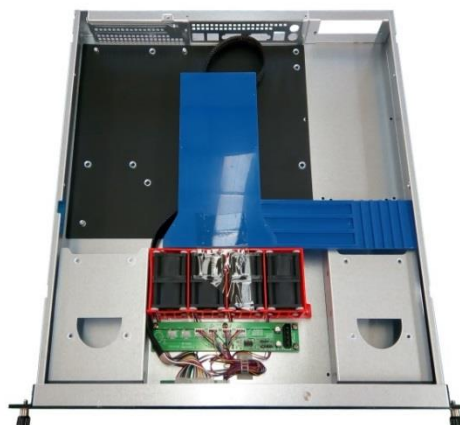

#### Technical Parameters:

Cases Style	Rack
Cases Type	1U2bay
Compatible board size	ATX (12" x9.6")
Compatible motherboard brand	INTEL, Asus, Supermicro, Tyan, MSI, Gigabyte, etc
Front panel instructions	2XUSB; 1XPower button, 1XReset button, 1XPower LED, 1 HDD LED and 2 network LEDs.
Support Power type	1U single power
Support Power Quantity	1PCS
Drive bays	Two 3.5-inch or 2.5-inch hard drives
CD-ROM drive	1 PCS notebook CD-ROM drive
HDD Backplane	Not supported
Hot-swappable fans	Not Supported
Cooling System	Standard configuration with 4 branded 4028 fans, each fan speeds up to 13,000 rps. each fan reaching rpm of 6,000,Optional for 6 fans
Expansion card slots	One full-height PCI
Intelligent temperature control	Supported
Hard disk shock proof	The shockproof fan reduces the resonance between the fan and the hard disk, and does not affect the read-write speed of the hard disk

## CASES DATA SHEET

Slide way Support	Optional
SGPIO	Optional
Material	Imported SGCC (galvanized sheet)
Power cut when lid is opened	Not Supported
Cases Dimensions	450 ( L ) X 434(W) X 45(H) mm,17.7" X 17" X 1.7"
Packing Dimensions	503(L)X503X(W)X90(H)mm
Net weight	5.7kg
Gross weight	8kg