


TX7201

Addressable Zone Monitor Unit

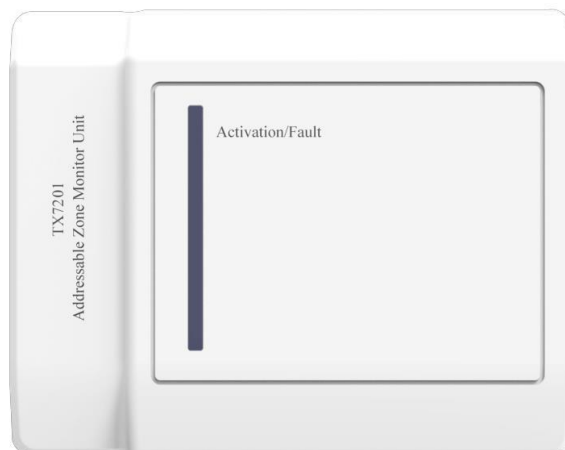

1 Feature and Benefits

- EN54-18 Compliance
- Built-in MCU processor and digital addressing
- Intelligent self-diagnosis of open circuit
- LED status indicator
- Onsite Adjustable Parameter
- Loop and external power input
- Aesthetically pleasing design
- Parallel connecting up to 16 conventional detector
- Unit mounting with fix base for simple installation
- Reset Power output, Reset time 6s, Current<60Ma

2 Technical Specification

- | | |
|-----------------------------|---------------------------------------------------------------------------|
| ● Input Voltage | Loop Power:24VDC [16V to 28V]
External PSU: 20 to 28VDC |
| ● Current Consumption | Loop: Standby 1.3mA, Alarm: 5mA
External PSU: Standby10mA, Alarm: 60mA |
| ● Control output voltage | 24VDC 60mA |
| ● End of line Resistance | 5.1Kohms/ ¼ W |
| ● Protocol/Addressing | T&A, Value range from 1 to 254 |
| ● Indicator Status | Normal: Single blink/Active: Steady/Fault:
Double Blink |
| ● Material / Colour | ABS / White Glossy finishing |
| ● Dimension / LWH | 108 mm x 86 mm x38 mm |
| ● Weight | 154g (with Base), 83g (without Base) |
| ● Operating Temperature | -10°C to +50°C |
| ● Ingress Protection Rating | IP30 |
| ● Humidity | 0 to 95% Relative Humidity, Non condensing |